


Strong, Quiet, Beautiful

Have it all with CFM's latest solutions for custom hood ventilation

Start with almost any custom wood, copper, stainless steel, or practically any other range hood material, and add a CHL Maxivent hood insert complete with removable filters, variable speed controls, and dimmable halogen lighting. Complete the system with one of our powerful and quiet AXC or EXT remote fans. For the quietest possible installation add one of our optional sound attenuators.

- 
- 22 gauge stainless steel construction
 - Infinitely variable speed control
 - Sealed halogen lights (dimmable) with control
 - Filters are removable for easy cleaning (dishwasher safe)
 - Pre-wired for any AXC or EXT remote fan

CHL Maxivent Hood Insert



Custom Hood Solutions by CFM



Your Custom Range Hood

+



CHL Maxivent Hood Insert

+



Optional Sound Attenuator

+



AXC Fan

or



EXT Fan

= The ultimate in quiet, powerful, attractive range hood ventilation.

Why the CFM Solution is Better

Our Maxivent hood inserts are manufactured in durable stainless steel and will fit most custom hoods designs. Maxivent hood inserts provide beautiful state of the art lighting and one touch infinitely variable speed control of a remote mounted fan.

Our AXC and EXT remote fans feature our durable external rotor motor for powerful, quiet performance. They are stronger and quieter than typical range hood fans. AXC fans are typically mounted in an attic space with just a small vent protruding from the roof while EXT weatherproof fans are designed for mounting on an outside wall.

Our SA Sound attenuators (silencers) provide the quietest possible installation. They will typically reduce sound levels by up to 50% or more.

Recommended Fans for CHL Maxivent Hood Inserts

CHL36 MAXIVENT HOOD INSERT

FAN PERFORMANCE DATA – CUBIC FEET PER MINUTE VS. SP (IN. WG.)


MODEL NO.	Location	Mounting	0"	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"	4 1/2"
EXT 150A	exterior	wall	227	202	186	174	162	130	85	21					
EXT 150B	exterior	wall	396	373	350	326	311	268	232	190	149	66			
EXT 200A	exterior	wall	445	393	358	328	300	254	212	170	119				
AXC 200A	interior	inline	418	397	366	339	306	233	174	110	56				
AXC 200B	interior	inline	636	618	557	521	494	412	353	271	190	78			
AXC 250	interior	inline	695	659	610	541	500	359	279	197	125	41			
AXC 315A	interior	inline	865	824	765	736	677	553	459	365	283	124			
AXC 315B	interior	inline	1198	1165	1052	981	945	796	615	453	363	178	65		

CHL48 MAXIVENT HOOD INSERT

FAN PERFORMANCE DATA – CUBIC FEET PER MINUTE VS. SP (IN. WG.)


MODEL NO.	Location	Mounting	0"	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"	4 1/2"
EXT 200A	exterior	wall	445	393	358	328	300	254	212	170	119				
AXC 250	interior	inline	695	659	610	541	500	359	279	197	125	41			
AXC 315A	interior	inline	865	824	765	736	677	553	459	365	283	124			
AXC 315B	interior	inline	1198	1165	1052	981	945	796	615	453	363	178	65		
AXC 355A	interior	inline	1325	1220	1105	985	860	688	550	400	238				
AXC 355B	interior	inline	1400	1375	1360	1335	1285	1220	1135	1075	1000	880	675	425	200

Sound Attenuator
Galvanized steel silencers will typically reduce "perceived" sound level of kitchen ventilation system by more than 50%.

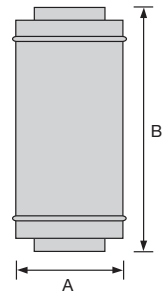

SA DIMENSIONS

MODEL NO.	DIA.	A	B	WEIGHT/LBS.
SA150	6"	10.2"	29.0"	12.5
SA200	8"	12.6"	29.0"	15.5
SA250	10"	14.6"	29.0"	19.5
SA315	12"	17.1"	29.0"	26.0

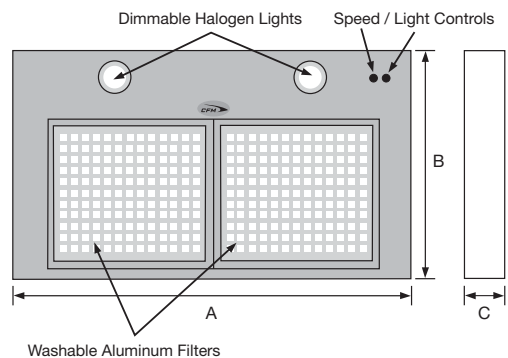

HOOD INSERT DIMENSIONS

MODEL NO.	Duct Size	A	B	C
CHL36	8"	34 1/2"	22"	6"
CHL48	10"	46 1/2"	22"	6"
CHL36-48	Replacement Filters*			

* CHL36 hood uses 2 filters / CHL48 hood uses 3 filters



Continental Fan Manufacturing Inc.
203 Eggert Road, Buffalo, NY 14215
Tel.: 800-779-4021
Fax: 716-842-0611
www.continentalfan.com
e-mail: cfm@continentalfan.com



Aeroflo Inc.
12-205 Matheson Blvd. E.
Mississauga, Ontario, Canada L4Z 3E3
Tel.: 800-779-4021 / 905-890-6192
Fax: 905-890-6193
www.aeroflo.com e-mail: aeroflo@aeroflo.com

Distributed By: